

8

7

6

5

4

3

2

1

8

7

6

5

4

3



2

1

NOTES:

- ENCLOSURE TYPE:  
WEATHERPROOF, IP66(NEMA 4X), LIGHT GRAY, POLYSTYRENE  
ENCLOSURE. REMOVEABLE COVER WITH SELF RETAINING SCREWS.
- CABLE GLAND GRIP RANGE: 0.230-0.530 INCHES
- WEIGHT: 1 LB (0.45 Kg)
- SUGGESTED MOUNTING HARDWARE: 8-32 SOCKET HEAD CAP SCREW.  
MOUNTING HOLE ENCLOSURE THICKNESS: 0.188 INCH  
MOUNTING HOLE SCREW HEAD MAX DIAMETER: 0.340 INCH  
MOUNTING HOLES LOCATED UNDER EACH COVER SCREW (4 TOTAL).
- CABLE GLANDS A AND B ARE PROVIDED FACTORY INSTALLED FOR  
PRIMARY POWER INPUT AND LAMP POWER OUTPUT CABLES. TWO  
ADDITIONAL CABLE GLANDS ARE PROVIDED LOOSE WITH THE WLC1  
FOR LOW VOLTAGE CONTROL INPUT AND OPTIONAL MONITOR OUTPUT  
CABLES. THESE TWO GLANDS MAY BE INSTALLED IN ANY TWO OF  
THE FOUR POSITIONS C, D, E, AND/OR F AS REQUIRED TO BEST  
SUITE THE INSTALLATION LOCATION.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

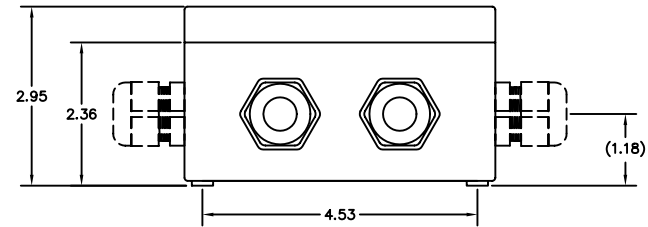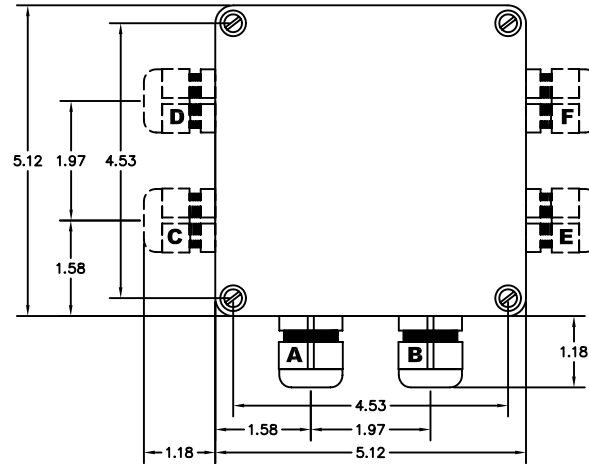

QTY	REV	U of M	PART NUMBER OR IDENTIFYING NUMBER	CAGE CODE	DESCRIPTION

PARTS LIST	
MATERIAL	UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES AND INCLUDE APPLIED FINISH
FINISH	INTERPRET DRAWING PER ANSI Y14.5M-1994
	DRAWN BY BCS ZJW/MS
	APPD ENG BCS
	APPD MFS
	CHECKED
	APPD
	NEXT ASSY: WLC1
	USED ON WLC1

 <b>BRADSHAW COMMUNICATION SYSTEMS</b> CUMMING, GEORGIA	<b>OUTLINE MOUNTING, WLC1</b>
SIZE: <b>D</b> CAGE CODE: <b>BCS</b> DWG NO: <b>OMD-WLC1</b>	DRAWING NO.: <b>OMD-WLC1</b> SCALE: 1=1 SHEET 1 of 1