

8

7

6

5

4

3


2

1



NOTES:

- ENCLOSURE TYPE:  
WEATHERPROOF, IP66(NEMA 4X), LIGHT GRAY, POLYSTYRENE ENCLOSURE. REMOVEABLE COVER WITH SELF RETAINING SCREWS.
- INTERFACE CABLE GLAND GRIP RANGE: 0.230-0.530 INCHES (EACH UNIT SUPPLIED WITH "BUILD UP" TAPE TO SUPPORT ROUND AND IRREGULAR CABLE OUTER DIAMETERS AS SMALL AS 0.10 INCH).
- WEIGHT: 1 LB (0.45 Kg)
- SUGGESTED MOUNTING HARDWARE: 8-32 SOCKET HEAD CAP SCREW. MOUNTING HOLE ENCLOSURE THICKNESS: 0.188 INCH. MOUNTING HOLE SCREW HEAD MAX DIAMETER: 0.340 INCH. MOUNTING HOLES LOCATED UNDER EACH COVER SCREW (4 TOTAL).
- CABLE GLAND "A" IS PROVIDED FOR BASE UNIT INTERFACE. CABLE GLAND "B" SUPPORTS LOCAL AMBIENT TEMPERATURE PROBE. CABLE GLANDS "C", "D", "E", & "F" ARE PROVIDED WITH OPTIONAL REMOTE SENSORS (ORDERED SEPARATELY FROM THE BASE UNIT).
- LOCATE UNIT SUCH THAT TEMPERATURE PROBE IS NOT IN DIRECT EXPOSURE TO SUNLIGHT AND AWAY FROM HEAVY AIR CURRENTS THAT MAY AFFECT TEMPERATURE MEASUREMENT ACCURACY.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	CHANGE LOCAL SENSOR LOCATION	09.JUN.06	BCSENG



OPTIONAL REMOTE TEMPERATURE SENSOR  
(XXX DENOTES LENGTH BASED ON P/N)

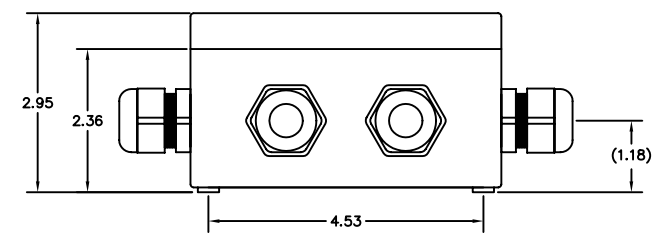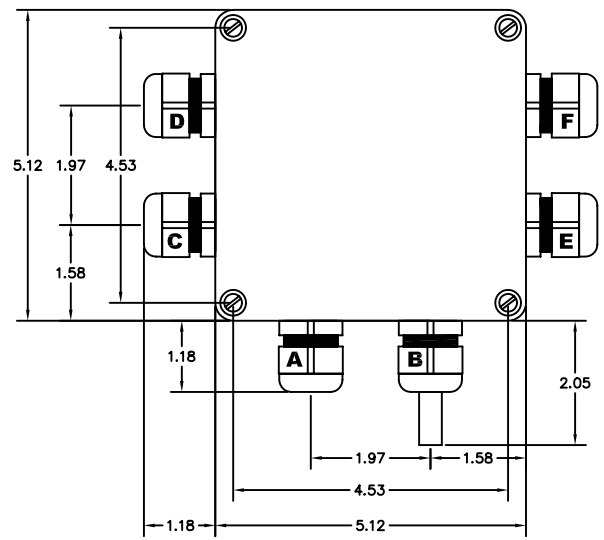

QTY	REV	U of M	PART NUMBER OR DESCRIPTION NUMBER	CAGE CODE	DESCRIPTION
PARTS LIST					
MATERIAL	UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES AND INCLUDE APPLIED FINISH		INTERPRET DRAWING PER ANSI Y14.5M-1994		 BRADSHAW COMMUNICATION SYSTEMS CUMMING, GEORGIA
FINISH	TOLERANCES		DRAWN BY BCSENG/IMP/ROE		
	1 PLACE DECIMALS ±0.1		APPD ENG BCSENG/IMP/ROE		
	2 PLACE DECIMALS ±0.03		APPD MFG		
3 PLACE DECIMALS ±0.010		CHECKED		<b>OUTLINE MOUNTING, WTM1</b>	
ANGLES ±		APPD			
HOLE DIAMETERS PER ANSI/ASME Y14.5M-1994		NEXT ASSY: WTM1		SIZE: <b>D</b>	CAGE CODE: <b>BCS</b>
REVISIONS: NON-CUMULATIVE		USED ON: WTM1		DWG NO.: <b>OMD-WTM1</b>	DRAWING NO.: <b>OMD-WTM1</b>
PARENTHERETICAL INFORMATION FOR REFERENCE ONLY.					
				SCALE: 1=1	SHEET 1 of 1

8

7

6

5

4

3

2

1